




MC PROPELLER FLOW METERS

Ideal Flow Measurement for Agriculture and Irrigation

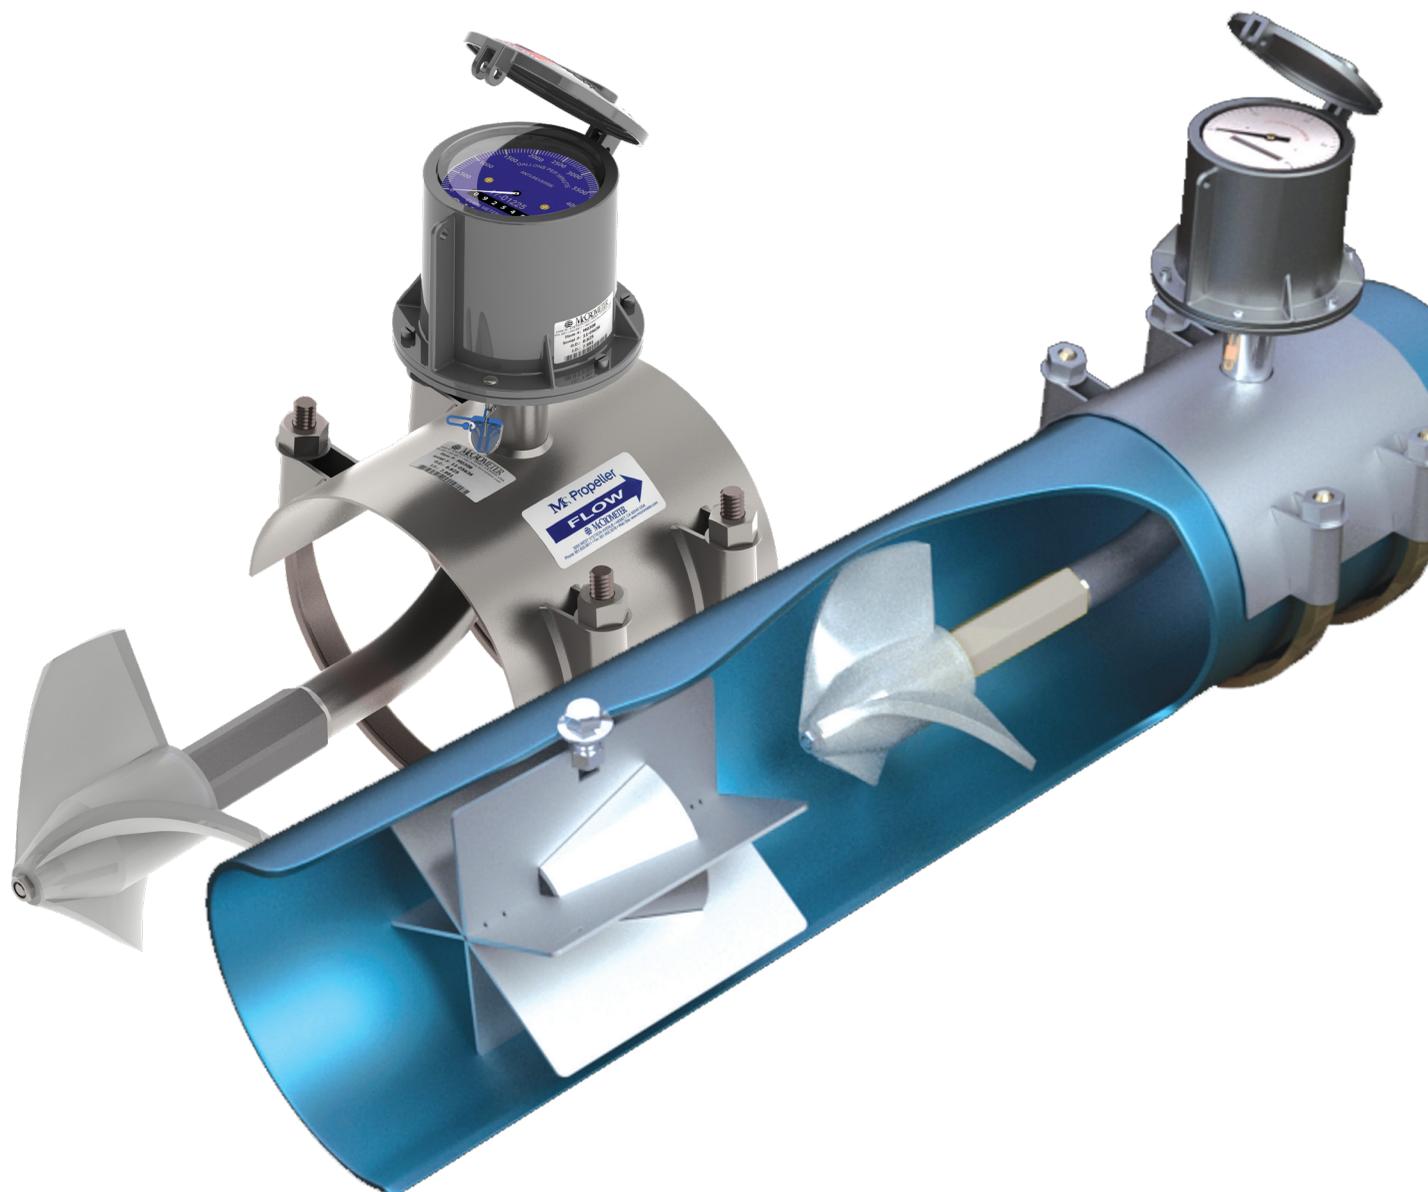

The Best Solution For Irrigation Flow Measurement

Register / Transmitter Options

Mechanical Register - Standard

An instantaneous flowrate indicator with optional six-digit or seven-digit straight reading totalizer and standard. The register is hermetically sealed with a die cast aluminum case. This protective housing includes a domed acrylic lens and hinged lens cover with locking clasp.




Digital Transmitter - Optional

This newly redesigned, highly compatible unit gives users confidence to integrate with existing systems when measuring flow. Now FlowCom customers can enjoy a more durable housing that resists water intrusion and gives FlowCom room to grow. The new larger enclosure allowed us room to add a built-in data logger to track usage over long periods of time and make room for SmartTrax™ with ExactRead™ Technology built directly into the FlowCom, when customers want telemetry for remote meter reading.



Wireless Transmitter - Optional

FlowConnect with Exact Read advanced technology ensures you have an accurate and exact reading from transmitter to website. Unlike traditional telemetry systems, FlowConnect's unique one-piece design eliminates the need for cables, pole mounting and other hardware. Get more data, faster and have it delivered to the palm of your hand with FlowConnect. Available with cellular or satellite communication protocols.

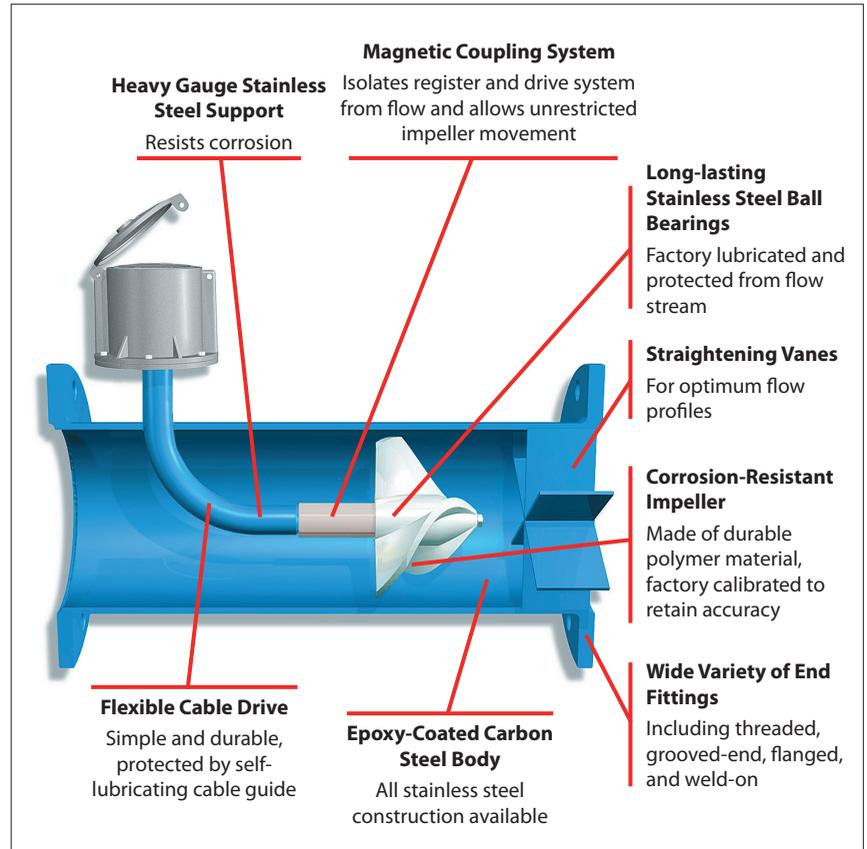

Simple and Effective

- Available with all of the features you need, none of the features you don't
- Requires no power to operate, no batteries to fail
- Straightforward, hassle-free installation; just cut the pipe and bolt on
- Easy to read with a mechanical register that calculates both total and instantaneous flow



When it comes to your flow measurement needs, there are many options available. But for a highly accurate and reliable product at a reasonable price, McCrometer makes the most sense.

The Mc Propeller is the industry standard for propeller technology, continually outperforming all other flow meters in the agricultural and turf markets.

Our flow meters are simple to install and operate, require minimal maintenance, and are equipped with all the features you need. It's no wonder that it's the #1 choice for irrigation use.

Engineered for Accuracy, Durability, and Economy

		Pressure Rating	Standard Totalizer	Indicator/Totalizer	Digital	Wireless
4" - 16"	M0300 - Bolt-on Saddle <ul style="list-style-type: none"> Stainless steel construction Can be used on a variety of pipe materials: Steel, plastic, cast iron, cement, or asbestos cement 	150 PSI	Standard	Standard	Optional	Optional
4" - 12"	M0300SW - Bolt-on Saddle Surface Water <ul style="list-style-type: none"> Stainless steel construction Can be used on a variety of pipe materials: Steel, plastic, cast iron, cement, or asbestos cement 	150 PSI	Standard	Standard	Optional	Optional
18" - 48"	M1400 - Large Line, Bolt-on Saddle <ul style="list-style-type: none"> Can be used on a variety of pipe materials: Steel, plastic, cast iron, cement, or asbestos cement 	75 PSI	Standard	Standard	Optional	Optional
10" - 24"	M1700 - Open Flow <ul style="list-style-type: none"> Can be used on a variety of pipe materials: Steel, plastic, cast iron, cement, or asbestos cement 	Atmospheric	Standard	Standard	Optional	Optional
24" - 72"	M1700 - Open Flow <ul style="list-style-type: none"> Can be used on a variety of pipe materials: Steel, plastic, cast iron, cement, or asbestos cement 	Atmospheric	N/A	N/A	Standard	Optional
2" - 12"	MF100 - Flanged End <ul style="list-style-type: none"> AWWA Class D Flanges Optional flow straightening vanes welded in the tube 	150 PSI	Standard	Standard	Optional	Optional
6" - 12"	ML100 - Irrigation Flanged <ul style="list-style-type: none"> Optional flow straightening vanes welded in the tube 	75 PSI	Standard	Standard	Optional	Optional

M0300



M0300SW



M1400



MF100



ML100



M1700



Options and Accessories

- Electronic outputs connect with your system for better irrigation management
- Over-run bearing extends meter life in high flow applications
- 7-digit totalizer increases the maximum total recordable volume

TYPICAL APPLICATIONS

- Agricultural Irrigation
- Turf Irrigation
- Center Pivot Systems
- Drip and Sprinkler Systems
- Greenhouse Growers
- Park Management
- Pumping Stations
- Canal Laterals
- Golf Courses

Designed for Accuracy, Built to Last

- Durable, built with a time-tested rugged design
- Consistent and repeatable measurements due to the simplicity of our proven propeller design
- Versatile, with a wide range of applications

To find out more about our flow measurement products, or for a free flow evaluation, contact your nearest Mc Propeller representative today or visit our website at www.mccrometer.com. You can reach us directly at 1-800-220-2279.

Specifications

All flow meters comply with the American Water Works Association Standard No. C704-08.

PERFORMANCE

Accuracy/Repeatability	±2% of reading guaranteed throughout full range; ±1% over reduced range; calibrated in our NIST traceable test facilities. Repeatability of 0.25% or better.
Maximum Temperature	(Standard Construction) 160°F constant.
MATERIALS	
Bearing Assembly	Impeller shaft is 316 stainless steel. Ball bearings are 440C stainless steel.
Register	An instantaneous flowrate indicator and six-digit straight-reading totalizer are standard. The register is hermetically sealed within a die-cast aluminum case. This protective housing includes a domed acrylic lens and a hinged lens cover with locking hasp.
Propeller	Propellers are manufactured of high-impact plastic, retaining their shape and accuracy over the life of the meter. High temperature impeller is optional.

Any published technical data and specifications are subject to change without notice.

The Flow Straightener

A tight-spot solution that saves money


By reshaping irregular flow into a smooth stream, the advanced Flow Straightener offers higher accuracy and repeatability when installed in as little as 1.5 pipe diameters from chemigation, butterfly and gate valves, out-of-plane elbows, and reducers. Saving money by reducing piping and labor costs, the Flow Straightener is ideal for both new and retrofit installations.

Straight Pipe Requirements

Mc Propeller M0308 with flow straightener



Other flow meters

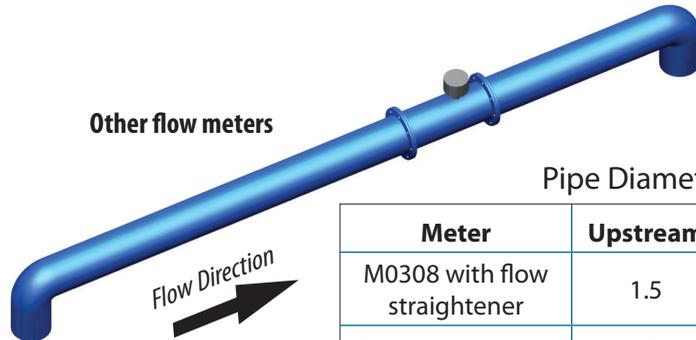

Pipe Diameters

Meter	Upstream	Downstream
M0308 with flow straightener	1.5	1
Other flow meters	10	5



Committed to Quality Manufacturing in the USA

McCrometer prides itself on the fact that all of its flow meters are designed, manufactured, and tested in the USA. Manufacturing takes place in our headquarters in Hemet, California and we own and operate one of the world's largest volumetric test facilities in Porterville, California. Our manufacturing facilities and quality control systems are the foundation for being a trusted supplier. Our USA based, high quality manufacturing is another reason our customers around the world have confidently chosen McCrometer flow meters for their most challenging flow applications since 1955.

Corporate Headquarters:

3255 West Stetson Avenue, Hemet, CA 92545 USA

Tel: 951-652-6811 | Fax 951-652-3078

www.mccrometer.com